

LED T5 Tube Series G5




Feature

- Achieving 100 lumens per watt at the system level.
- Operates using existing electronic instant start, programmed start, rapid start and dimmable fluorescent ballasts.
- The LED lamp is easy to install and fits into linear fluorescent fixtures, making it a perfect upgrade solution where energy savings and long life are critical. Meet ANSI C78.81-2013
- Meet UL1993-2012
- 5-years warranty (conditions apply)

Electrical Specification

Input voltage range	120 Vac—277 Vac, or 347 Vac, 480 Vac(50/60Hz)
Input Current	Determined by the Ballast specification
Input Power :	Determined by the Ballast specification
Power factor	>0.9 or Determined by the Ballast specification
THD :	<20% or Determined by the Ballast specification
Color Temp.	4000K
CRI :	> 80
Lumens(Lm)	3100 lm
Beam Angle :	> 180c
Average Life	40,000 H
Operating Temp.	-20°C—35 °C
Weight/PCS	200g
Replace Lamp :	F54/T5 HO (4feet)/G5 Base

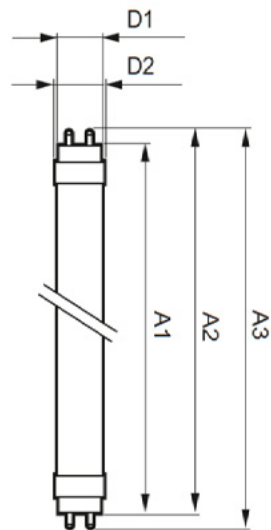

Mechanical Dimension

Model Type	A1	A2	A3	D1	D2
ISL-27W-48T5/8040	1148	1155	1162	16.3	18.5